


40Ah ESS Type Battery Cell

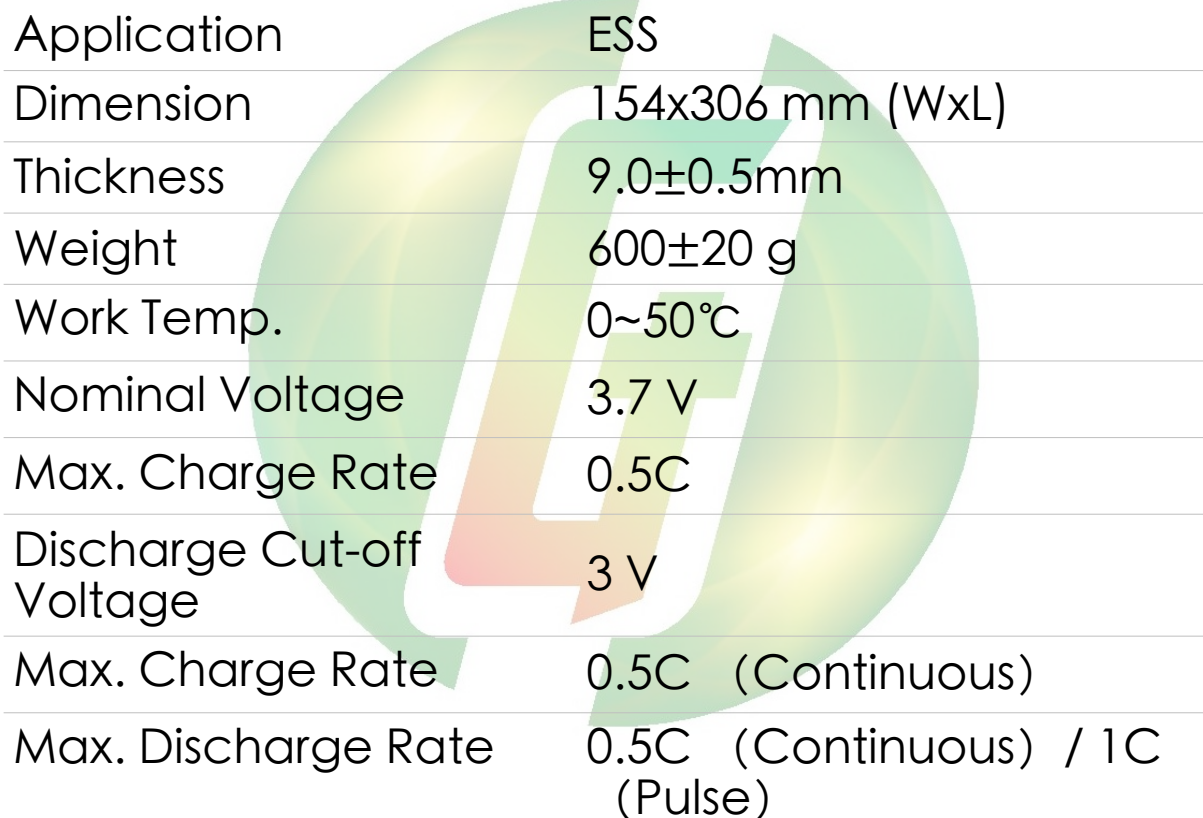

| | |
|---------------------------|--------------------------------|
| Application | ESS |
| Dimension | 154x306 mm (WxL) |
| Thickness | 9.0±0.5mm |
| Weight | 600±20 g |
| Work Temp. | 0~50°C |
| Nominal Voltage | 3.7 V |
| Max. Charge Rate | 0.5C |
| Discharge Cut-off Voltage | 3 V |
| Max. Charge Rate | 0.5C (Continuous) |
| Max. Discharge Rate | 0.5C (Continuous) / 1C (Pulse) |